




Geometrie

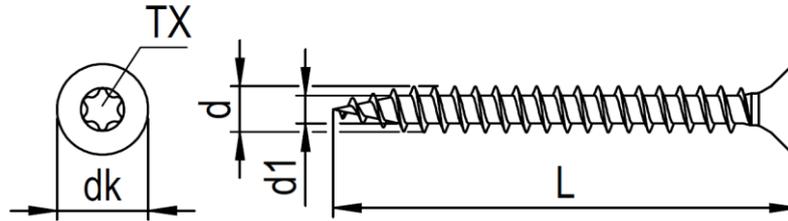

Angaben in mm

Ø d	3,0	3,5	4,0	4,5	5,0	6,0
Ø d1	2,1	2,4	2,7	2,9	3,3	3,9
Ø dk	6,0	7,0	8,0	9,0	10,0	12,0
Steigung	1,4	1,6	1,8	2,0	2,2	2,6
Antrieb	TX 10	TX 15	TX 20	TX 25	TX 25	TX 30
L	12 - 30	12 - 25	16 - 25	16 - 35	25 - 35	40

Werkstoff: Stahl
Oberfläche: gelb verzinkt

Technik



EN 14592: 2008+A1:2012

Ø d	3,0	3,5	4,0	4,5	5,0	6,0
Bruchdrehmoment [Nm]	1,5	2,0	3,0	4,3	6,2	10,8

Einsatzbereich

Verbindungen aus Holz im Innenbereich, Beschlagteile, Holzkonstruktionen und Holzwerkstoffplatten.