

Declaration of Performance

1343-CPR-M 574-2/06.16

1. Unique identification code of the product-type: Mungo concrete screw MCS and MCSr sizes 6, 8, 10, 12 and 14 mm for use in cracked and uncracked concrete

2. Manufacturer: Mungo Befestigungstechnik AG, Bornfeldstrasse 2, CH-4603 Olten/Switzerland

3. System/s of AVCP: System 1

4. Intended use or use/es:

Product	Intended use
Concrete screw for use in concrete	Static and quasi-static loads, all sizes and all embedment depth

5. European Assessment Document: ETAG 001 Part 3, April 2013, used as EAD

European Technical Assessment: ETA-16/0296 of 10 May 2016

Technical Assessment Body: DIBt – Deutsches Institut für Bautechnik

Notified body/ies: 1343 MPA Darmstadt

6. Declared performance:

Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Product performance for static and quasi static action	See appendix, especially Annex C1 and C2
Product performance for seismic category C1	See appendix, especially Annex C4
Displacements under tension and shear loads	See appendix, especially Annex C3

Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	See appendix, especially Annex C5

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Massimo Pirozzi, Dipl.-Ing.
Head of Engineering



Olten, 2018-14-09

This DoP Has been prepared in different languages. In case there is a dispute on the interpretation the English version shall always prevail.

The Appendix includes voluntary and complementary information in English language exceeding the (language as neutrally specified) legal requirements.

product and installed condition


Mungo concrete screw MCS, MCSr and MCShr



carbon steel: MCS



stainless steel A4 and HCR
MCSr and MCShr

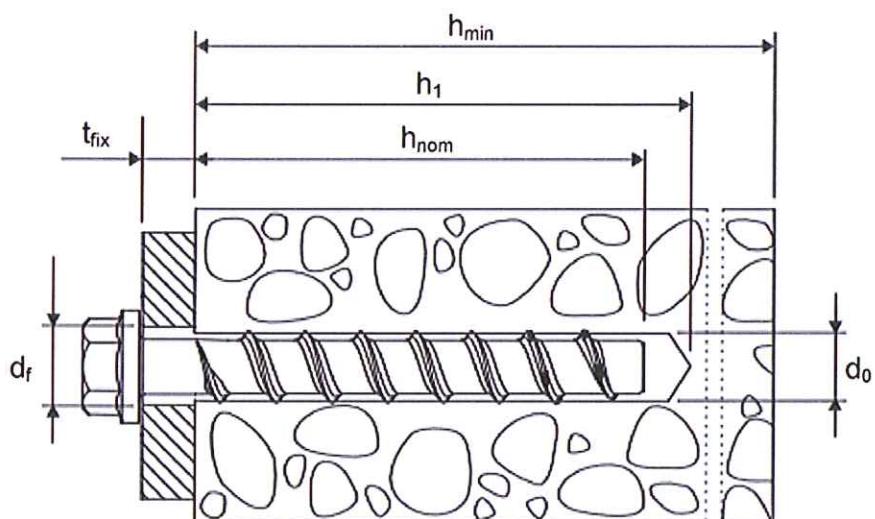

d_0	=	nominal drill bit diameter
h_{nom}	=	nominal anchorage depth
h_1	=	depth of the drill hole
h_{min}	=	minimum thickness of member
t_{fix}	=	thickness of fixture
d_f	=	diameter of clearance hole in the fixture

Mungo concrete screw MCS, MCSr and MCShr

Product description

Installed condition

Annex A 1

Table A1: materials and variants

part	name	Material			
1,	Concrete screw	MCS		Steel EN 10263-4 galvanized acc. to EN ISO 4042 or zinc flake coating acc. to EN ISO 10683 ($\geq 5\mu\text{m}$)	
2,		MCSR		1.4401, 1.4404, 1.4571, 1.4578	
3,		MCShr		1.4529	
4,					
5,					
6,					
7,					
8,		nominal characteristic steel yield strength		f_yk [N/mm 2]	560
9,		nominal characteristic steel ultimate strength		f_{uk} [N/mm 2]	700
10,		elongation at rupture		A_s [%]	≤ 8
11,					
				1)	Anchor version with connection thread and hexagon socket e.g. MCS-A 8x105 M10 SW5
				2)	Anchor version with connection thread and hexagon drive e.g. MCS-A 8x105 M10 SW7
				3)	Anchor version with washer, hexagon head and TORX e.g. MCS-S 8x80 SW13 VZ 40
				4)	Anchor version with washer and hexagon head e.g. MCS-S 8x80 SW13
				5)	Anchor version with washer, hexagon head and e.g. MCS-S 8x80 SW13 OS
				6)	Anchor version with countersunk head e.g. MCS-SK 8x80 C VZ 40
				7)	Anchor version with pan head e.g. MCS-P 8x80 P VZ 40
				8)	Anchor version with large pan head e.g. MCS-PG 8x80 LP VZ 40
				9)	Anchor version with countersunk head and connection thread e.g. MCS-ASK 6x55 AG M8
				10)	Anchor version with hexagon drive and connection thread e.g. MCS-AS 6x55 M8 SW10
				11)	Anchor version with internal thread and hexagon drive e.g. MCS-I 6x55 IM M8/10

Mungo concrete screw MCS, MCSR and MCShr

Product descriptions

Materials und versions

Annex A 2

Table A2: dimensions and markings

Anchor size MCS, MCSr, MCShr		6		8			10		
Nominal embedment depth h_{nom} [mm]		$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$
		40	55	45	55	65	55	75	85
Length of the anchor	$L \leq$	[mm]			500				
Diameter of shaft	d_k	[mm]			5,1		7,1		9,1
Diameter of thread	d_s	[mm]			7,5		10,6		12,6
Anchor size MCS, MCSr, MCShr		12			14				
Nominal embedment depth h_{nom} [mm]		$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$		
		65	85	100	75	100	115		
Length of the anchor	$L \leq$	[mm]			500				
Diameter of shaft	d_k	[mm]			11,1		13,1		
Diameter of thread	d_s	[mm]			14,6		16,6		



Marking:
MCS

Anchor type: TSM
Anchor size: 10
Length of the anchor: 100




Marking:
MCSr

Anchor type: TSM
Anchor size: 10
Length of the anchor: 100
Material: A4



Marking:
MCShr

Anchor type: TSM
Anchor size: 10
Length of the anchor: 100
Material: HCR

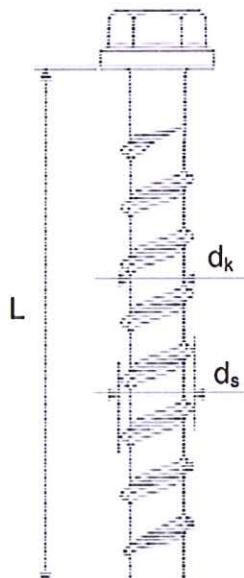

Mungo concrete screw MCS, MCSr and MCShr

Product descriptions

Dimensions and markings

Annex A 3

Intended use

Anchorage subject to:

- static and quasi-static loads, all sizes and all embedment depth,
- used for anchorages with requirements related to resistance of fire, all sizes and all embedment depth,
- used for anchorages with seismic actions category C1, sizes 8-14 for maximum embedment depth h_{nom3} .

Base materials:

- reinforced and unreinforced concrete according to EN 206-1:2000-12,
- strength classes C20/25 to C50/60 according to EN 206-1:2000-12,
- cracked and uncracked concrete.

Use conditions (Environmental conditions):

- The anchor may only be used in dry internal conditions: All screw types,
- Structural subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition no particular aggressive conditions exists: screw types made of stainless steel with marking A4,
- Structural subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition if particular aggressive conditions exists: screw types made of stainless steel with marking HCR.

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work,
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.),
- Anchorages under static or quasi-static actions are designed for design Method A in accordance with:
 - ETAG 001, Annex C, Edition August 2010 or
 - CEN/TS 1992-4:2009.
- Anchorages under seismic actions are designed in accordance with:
 - EOTA Technical Report TR 045, Edition February 2013.
 - Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure.
 - Fastenings in stand-off installation or with a grout layer are not allowed.
- Anchorages under fire exposure are designed in accordance with:
 - EOTA Technical Report TR 020, Edition May 2004 or
 - CEN/TS 1992-4:2009, Annex D (It must be ensured that local spalling of the concrete cover does not occur).
- In general, the conditions given in ETAG 001, Annex C, section 4.2.2.1 a) and section 4.2.2.2 b) are not fulfilled because the diameter of clearance hole in the fixture according to Annex B2, Table B1 is greater than values given in ETAG 001, Annex C, Table 4.1 for the corresponding diameter of the anchor.

Installation:

- Hammer drilling only.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.
- After installation further turning of the anchor is not possible. The head of the anchor is supported on the fixture and is not damaged.
- The drill hole may be filled with injection mortar Chemofast CF-T 300 V.
- Adjustability according to Annex B4: sizes 8-14, all anchorage depths.

Mungo concrete screw MCS, MCSr and MCShr


Intended use

Specifications

Annex B 1

Table B1: Installation parameters

Anchor size MCS, MCSr, MCSNr			6		8			10		
Nominal embedment depth h_{nom} [mm]			$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$
			40	55	45	55	65	55	75	85
Nominal drill bit diameter	d_0	[mm]	6			8			10	
Cutting diameter of drill bit	$d_{\text{cut}} \leq$	[mm]	6,40			8,45			10,45	
Depth of drill hole	$h_1 \geq$	[mm]	45	60	55	65	75	65	85	95
Diameter of clearing hole in the fixture	$d_f \leq$	[mm]	8			12			14	
Installation torque	T_{inst}	[Nm]	10			20			40	
Anchor size MCS, MCSr, MCSNr			12			14				
Nominal embedment depth h_{nom} [mm]			$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$		
			65	85	100	75	100	115		
Nominal drill bit diameter	d_0	[mm]	12			14				
Cutting diameter of drill bit	$d_{\text{cut}} \leq$	[mm]	12,50			14,50				
Depth of drill hole	$h_1 \geq$	[mm]	75	95	110	85	110	125		
Diameter of clearing hole in the fixture	$d_f \leq$	[mm]	16			18				
Installation torque	T_{inst}	[Nm]	60			80				

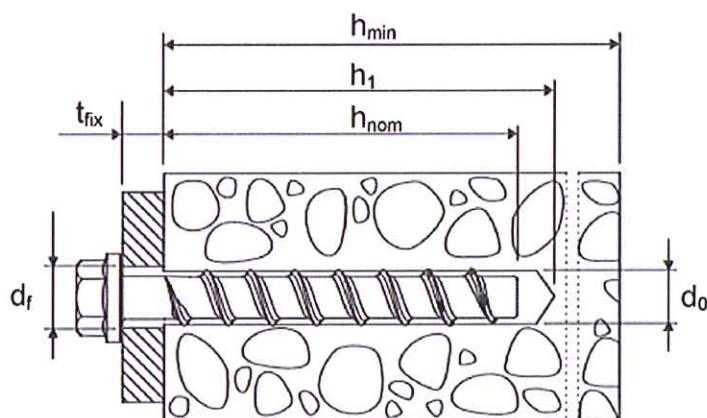

Mungo concrete screw MCS, MCSr and MCSNr

Intended use


Installation parameters

Annex B 2

Table B2: Minimum thickness of member, minimum edge distance and minimum spacing

Anchor size MCS, MCSr, MCShr			6		8			10				
Nominal embedment depth h_{nom} [mm]			$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$		
			40	55	45	55	65	55	75	85		
Minimum thickness of member	h_{min}	[mm]	100			100		120	100	130	130	
Minimum edge distance	c_{min}	[mm]	40			40	50			50		
Minimum spacing	s_{min}	[mm]	40			40	50			50		
Anchor size MCS, MCSr, MCShr			12			14						
Nominal embedment depth h_{nom} [mm]			$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$				
			65	85	100	75	100	115				
Minimum thickness of member	h_{min}	[mm]	120	130	150	130	150	170				
Minimum edge distance	c_{min}	[mm]	50			70	50	70				
Minimum spacing	s_{min}	[mm]	50			70	50	70				

Installation instructions

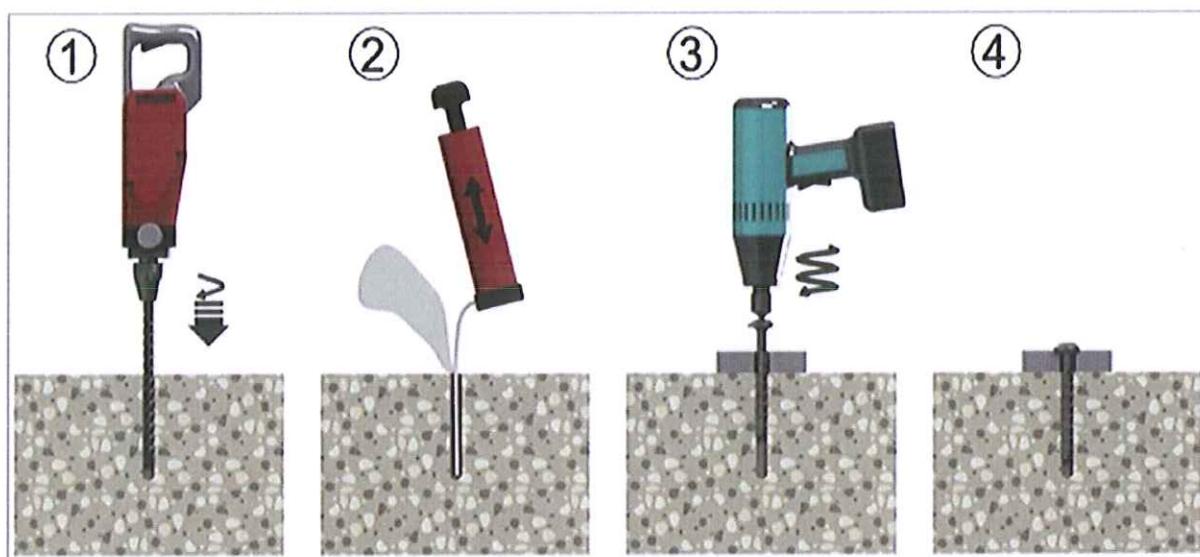


Mungo concrete screw MCS, MCSr and MCShr

Intended use

Minimum thickness of member, minimum spacing, minimum edge distance
and installation instructions

Annex B 3

Installation instructions for adjustability

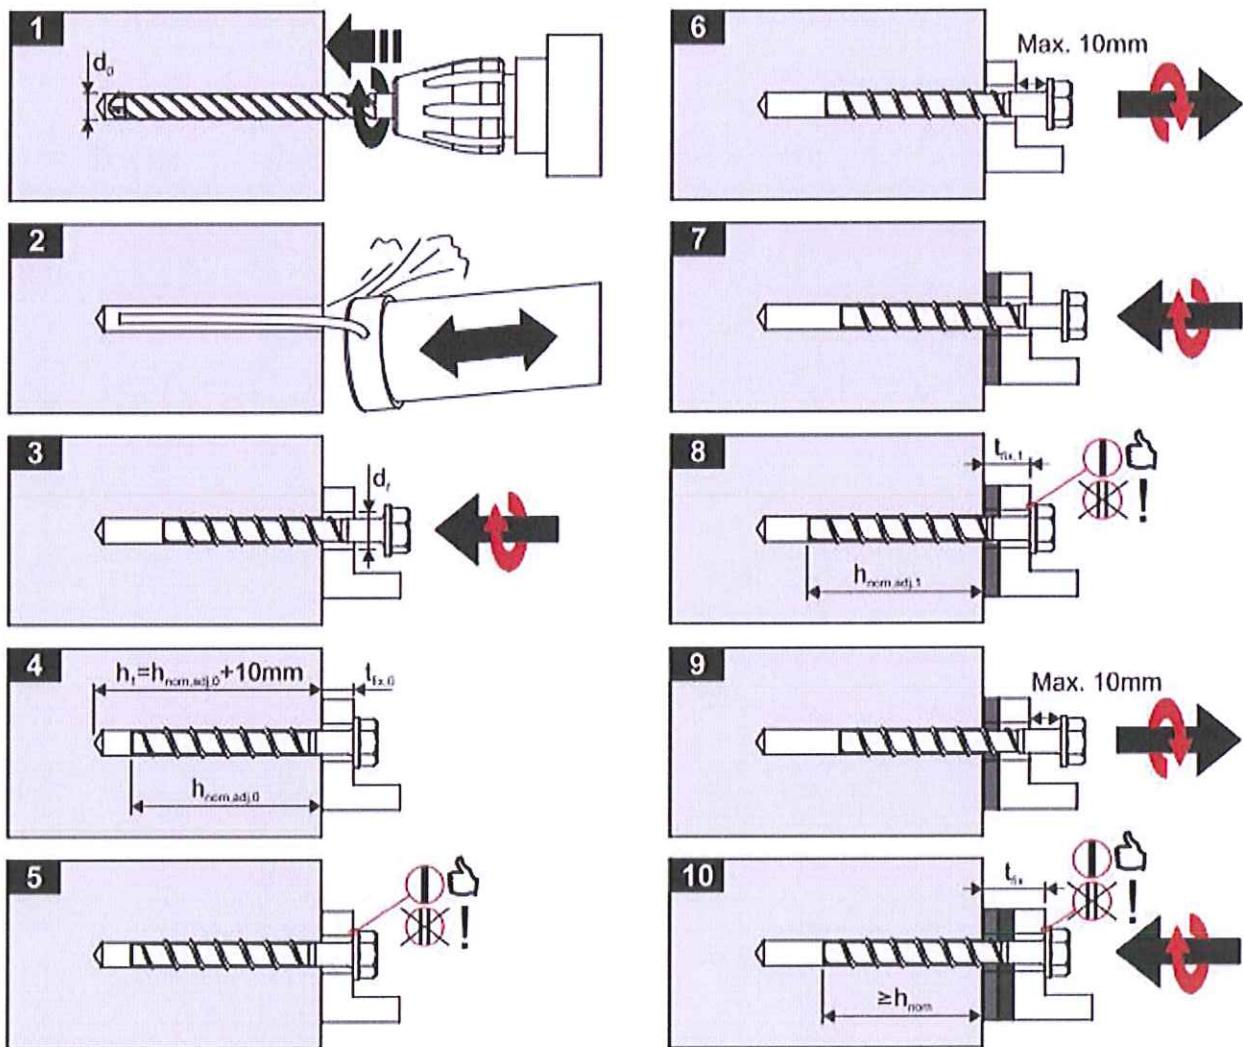

Installation instructions

The anchor may be adjusted maximum two times while the anchor may turn back at most 10 mm.
The total allowed thickness of shims added during the adjustment process is 10mm.
The final embedment depth after adjustment process must be equal or larger than h_{nom} .

Mungo concrete screw MCS, MCSr and MCShr

Intended use

Installation instruction for adjustability

Annex B 4

**Table C1: Characteristic values for design method A according to ETAG 001, Annex C
or CEN/TS 1992-4 for MCS, MCSr and MCShr 6, 8 and 10**

Anchor size MCS, MCSr, MCShr		6		8			10		
Nominal embedment depth h_{nom} [mm]	$h_{\text{nom}1}$		$h_{\text{nom}1}$			$h_{\text{nom}1}$			
	40	55	45	55	65	55	75	85	
steel failure for tension- and shear load									
characteristic load	$N_{Rk,s}$	[kN]	14,0		27,0			45,0	
	$V_{Rk,s}$	[kN]	7,0		17,0			34,0	
	k_2 ¹⁾	[-]	0,8		0,8			0,8	
	$M_{Rk,s}^0$	[Nm]	10,0		26,0			56,0	
pull-out failure									
characteristic tension load in cracked concrete C20/25	$N_{Rk,p}$	[kN]	2,0	4,0	5,0	9,0	12,0	9,0	Pull-out failure is not decisive
characteristic tension load in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	4,0	9,0	7,5	12,0	16,0	12,0	20,0
increasing factor for $N_{Rk,p}$	Ψ_c	C30/37	1,22						
		C40/50	1,41						
		C50/60	1,55						
concrete cone and splitting failure									
effective anchorage depth	h_{ef}	[mm]	31	44	35	43	52	43	60
factor for cracked	k_{cr} ¹⁾	[-]	7,2						
	k_{ucr} ¹⁾	[-]	10,1						
concrete cone failure	spacing	$s_{cr,N}$	3 x h_{ef}						
	edge distance	$c_{cr,N}$	1,5 x h_{ef}						
splitting failure	spacing	$s_{cr,Sp}$	120	160	120	140	150	140	180
	edge distance	$c_{cr,Sp}$	60	80	60	70	75	70	90
installation safety factor	γ_2 ²⁾	[-]	1,0						
	γ_{inst} ¹⁾								
concrete pry out failure (pry-out)									
k-Factor	k ²⁾	[-]	1,0						
	k_3 ¹⁾		2,0						
concrete edge failure									
effective length of anchor	$l_f = h_{\text{ef}}$	[mm]	31	44	35	43	52	43	60
outside diameter of anchor	d_{nom}	[mm]	6		8			10	

¹⁾ Parameter relevant only for design according to CEN/TS 1992-4:2009

²⁾ Parameter relevant only for design according to ETAG 001, Annex C

Mungo concrete screw MCS, MCSr and MCShr

Performances

Characteristic values for anchor size 6, 8 and 10

Annex C 1

**Table C2: Characteristic values for design method A according to ETAG 001, Annex C
or CEN/TS 1992-4 for MCS, MCSr and MCShr 12 and 14**

Anchor size MCS, MCSr, MCShr		12			14						
Nominal embedment depth h_{nom} [mm]		$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$				
		65	85	100	75	100	115				
steel failure for tension- and shear load											
characteristic load	$N_{Rk,s}$	[kN]	67,0			94,0					
	$V_{Rk,s}$	[kN]	40,0			56,0					
	k_2 ¹⁾	[-]	0,8			0,8					
	$M_{Rk,s}^0$	[Nm]	113,0			185,0					
pull-out failure											
characteristic tension load in cracked concrete C20/25	$N_{Rk,p}$	[kN]	12,0	Pull-out failure is not decisive	Pull-out failure is not decisive						
	$N_{Rk,p}$	[kN]	16,0								
increasing factor for $N_{Rk,p}$	Ψ_c	C30/37	1,22								
		C40/50	1,41								
		C50/60	1,55								
concrete cone and splitting failure											
effective anchorage depth	h_{ef}	[mm]	50	67	80	58	79				
	k_{cr} ¹⁾	[-]	7,2								
factor for cracked	k_{ucr} ¹⁾	[-]	10,1								
concrete cone failure	spacing	$s_{cr,N}$	3 x h_{ef}								
	edge distance	$c_{cr,N}$	1,5 x h_{ef}								
splitting failure	spacing	$s_{cr,Sp}$	150	210	240	180	240				
	edge distance	$c_{cr,Sp}$	75	105	120	90	120				
installation safety factor	γ_2 ²⁾	[-]	1,0								
	γ_{inst} ¹⁾										
concrete pry out failure (pry-out)											
k-Factor	k ²⁾	[-]	1,0	2,0		1,0	2,0				
	k_3 ¹⁾										
concrete edge failure											
effective length of anchor	$l_f = h_{\text{ef}}$	[mm]	50	67	80	58	79				
outside diameter of anchor	d_{nom}	[mm]	12			14					

¹⁾ Parameter relevant only for design according to CEN/TS 1992-4:2009

²⁾ Parameter relevant only for design according to ETAG 001, Annex C

Mungo concrete screw MCS, MCSr and MCShr

Performances

Characteristic values for anchor size 12 and 14

Annex C 2

Table C3: Displacements under tension load for MCS, MCSr and MCShr

Anchor size MCS, MCSr, MCShr			6		8			10			
Nominal embedment depth h_{nom} [mm]			$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	
			40	55	45	55	65	55	75	85	
Cracked concrete	tension load	N	[kN]	0,95	1,9	2,4	4,3	5,7	4,3	7,9	9,6
	displacement	δ_{N0}	[mm]	0,3	0,6	0,6	0,7	0,8	0,6	0,5	0,9
		δ_{∞}	[mm]	0,4	0,4	0,6	1,0	0,9	0,4	1,2	1,2
Un-cracked concrete	tension load	N	[kN]	1,9	4,3	3,6	5,7	7,6	5,7	9,5	11,9
	displacement	δ_{N0}	[mm]	0,4	0,6	0,7	0,9	0,5	0,7	1,1	1,0
		$\delta_{N\infty}$	[mm]	0,4	0,4	0,6	1,0	0,9	0,4	1,2	1,2
Anchor size MCS, MCSr, MCShr			12			14					
Nominal embedment depth h_{nom} [mm]			$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$			
			65	85	100	75	100	115			
Cracked concrete	tension load	N	[kN]	5,7	9,4	12,3	7,6	12,0	15,1		
	displacement	δ_{N0}	[mm]	0,9	0,5	1,0	0,5	0,8	0,7		
		δ_{∞}	[mm]	1,0	1,2	1,2	0,9	1,2	1,0		
Un-cracked concrete	tension load	N	[kN]	7,6	13,2	17,2	10,6	16,9	21,2		
	displacement	δ_{N0}	[mm]	1,0	1,1	1,2	0,9	1,2	0,8		
		$\delta_{N\infty}$	[mm]	1,0	1,2	1,2	0,9	1,2	1,0		

Table C4 : Displacements under shear load for MCS, MCSr and MCShr

Anchor size MCS, MCSr, MCShr			6		8			10		
Nominal embedment depth h_{nom} [mm]			$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$
			40	55	45	55	65	55	75	85
shear load	V	[kN]	3,3		8,6			16,2		
	δ_{V0}	[mm]	1,55		2,7			2,7		
	$\delta_{V\infty}$	[mm]	3,10		4,1			4,3		
Anchor size MCS, MCSr, MCShr			12			14				
Nominal embedment depth h_{nom} [mm]			$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$		
			65	85	100	75	100	115		
shear load	V	[kN]	20,0			30,5				
	δ_{V0}	[mm]	4,0			3,1				
	$\delta_{V\infty}$	[mm]	6,0			4,7				

Mungo concrete screw MCS, MCSr and MCShr

Performances

Displacements under tension and shear loads

Annex C 3

Table C5: Characteristic values for seismic category C1 for MCS, MCSr and MCShr

Anchor size MCS, MCSr, MCShr		8	10	12	14
Nominal embedment depth h_{nom} [mm]		$h_{\text{nom}3}$			
		65	85	100	115
steel failure for tension- and shear load					
characteristic load	$N_{Rk,s,\text{seis}}$	[kN]	27,0	45,0	67,0
	$V_{Rk,s,\text{seis}}$	[kN]	8,5	15,3	21,0
pull-out failure					
characteristic tension load in cracked concrete C20/25	$N_{Rk,p,\text{seis}}$	[kN]	12,0	Pull-out failure is not decisive	
concrete cone failure					
effective anchorage depth	h_{ef}	[mm]	52	68	80
concrete cone failure edge distance	$s_{\text{cr},N}$	[mm]	$3 \times h_{\text{ef}}$		
installation safety factor	γ_2	[-]	1,0		
concrete pry out failure (pry-out)					
k-Factor	k	[-]	1,0		
concrete edge failure					
effective length of anchor	$l_f = h_{\text{ef}}$	[mm]	52	68	80
outside diameter of anchor	d_{nom}	[mm]	8	10	12
					92

Mungo concrete screw MCS, MCSr and MCShr

Performances

Characteristic values for seismic category C1

Annex C 4

Table C6: Characteristic values of resistance to fire exposure for MCS, MCSr and MCShr

Anchor size MCS, MCSr, MCShr		6			8			10			12			14												
Nominal embedment depth	h_{nom}	1	2	1	2	3	1	2	3	1	2	3	1	2	3											
	[mm]	40	55	45	55	65	55	75	85	65	85	100	75	100	115											
steel failure for tension- and shear load ($F_{Rk,s,II} = N_{Rk,s,II} = V_{Rk,s,II}$)																										
Fire resistance class																										
R30	Characteristic Resistance	$F_{Rk,s,fi30}$	[kN]	0,9	2,4		4,4		7,3		10,3															
R60		$F_{Rk,s,fi60}$	[kN]	0,8	1,7		3,3		5,8		8,2															
R90		$F_{Rk,s,fi90}$	[kN]	0,6	1,1		2,3		4,2		5,9															
R120		$F_{Rk,s,fi120}$	[kN]	0,4	0,7		1,7		3,4		4,8															
R30		$M_{Rks,fi30}^0$	[Nm]	0,7	2,4		5,9		12,3		20,4															
R60		$M_{Rks,fi60}^0$	[Nm]	0,6	1,8		4,5		9,7		15,9															
R90		$M_{Rks,fi90}^0$	[Nm]	0,5	1,2		3,0		7,0		11,6															
R120		$M_{Rks,fi120}^0$	[Nm]	0,3	0,9		2,3		5,7		9,4															
edge distance																										
R30 bis R120		$c_{cr, fi}$	[mm]	$2 \times h_{ef}$																						
spacing				$4 \times h_{ef}$																						
R30 bis R120		$s_{cr, fi}$	[mm]																							

The characteristic resistance to fire exposure for pull-out failure, concrete cone failure, concrete pry-out failure and concrete edge failure shall be calculated according to TR 020 or CEN/TS 1992-4. If no value for $N_{Rk,p}$ is given, in the equation 2.4 and 2.5, TR 020 or in equation D.1 and D.2, CEN/TS 1992-4 the value of $N_{Rk,c}^0$ shall be inserted instead of $N_{Rk,p}$.

Mungo concrete screw MCS, MCSr and MCShr

Performances

Characteristic values of resistance to fire exposure

Annex C 5