

# MIT-Hybrid Plus Mortar for highest performance in concrete

## Injection anchors for use in concrete

The anchor is placed into a drilled hole filled with injection mortar. The steel element is anchored via the bond between metal part, injection mortar and concrete. The steel consist of a threaded rod, reinforcing bar or internal threaded rod



## 1 SPECIFICATIONS OF INTENDED USE

### Anchorage subject to:

-Static and quasi-static loads: M8 to M30, Rebar  $\varnothing 8$  to  $\varnothing 32$  or internal threaded rod (MIG-M) diameter M6 to M20 (see ETA-17/0128 of 7 June 2019) and tension Anchor M12 to M24 (see ETA-17/0130 of 7 June 2019)

### Base materials:

-Reinforced or unreinforced cracked or non-cracked normal weight concrete strength classes C20/25 to C50/60 according to EN 206:2013 (see ETA-17/0128 of 7 June 2019)  
-Dry or wet concrete and flooded bore holes (see ETA-17/0128 of 7 June 2019)

### Approvals:

-European Assessment Document for concrete connections (EAD 330499-01-0601)  
-European Assessment Document, for post-installed rebar connections (EAD 330087-00-0601)  
-Seismic action for Performance Category C1 and C2 is part of assessment document

### Reaction to fire:

-Anchorage with threaded rod or Rebar satisfy requirements for Class A1

### Resistance to fire:

-Assessment of resistance under fire exposure F120 (acc. to DIN EN 1363-1:2012 and Technical Report 020) for use in concrete  
-Fire resistance test certification for Rebar connections up to 360°C (ETA-17/0130 of 7 June 2019)


### Installation:

-Dry or wet concrete and flooded holes (not sea water)  
-Hole drilling by hammer, hollow or compressed air drill mode  
-Anchor Installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site

## 2 CURING TIME AND INSTALLATION INSTRUCTIONS

| MAXIMUM WORKING TIME AND MINIMUM CURING TIME |           |         |         |           |           |           |           |
|----------------------------------------------|-----------|---------|---------|-----------|-----------|-----------|-----------|
|                                              | -5 ÷ -1°C | 0 ÷ 4°C | 5 ÷ 9°C | 10 ÷ 14°C | 15 ÷ 19°C | 20 ÷ 29°C | 30 ÷ 40°C |
| max. working time $t_{gel}$                  | 50 min    | 25 min  | 15 min  | 10 min    | 6 min     | 3 min     | 2 min     |
| min. curing time in dry concrete $t_{cure}$  | 5 h       | 3.5 h   | 2 h     | 1 h       | 40 min    | 30 min    | 30 min    |
| min. curing time in wet concrete $t_{cure}$  | 10 h      | 7 h     | 4 h     | 2 h       | 80 min    | 60 min    | 60 min    |
| Cartridge temperature                        | 5 ÷ 40°C  |         |         |           |           |           |           |

### Graphic installation guide for MIT-Hybrid Plus Injection system

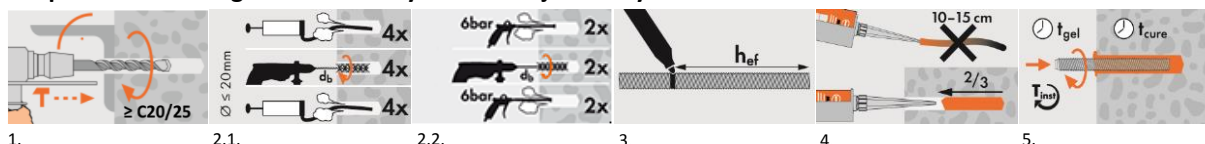

1. Drilling the hole with hammer, compressed air drill mode or hollow drill bit system acc. to ETA-17/0128 of 7 June 2019 (for the hollow drill bit system, no additional cleaning procedure given in point 2.1 and 2.2 is needed).
- 2.1. **Dry and wet uncracked concrete:** Manual cleaning acc. ETA 17/0128 (diameter of bore hole  $\leq 20$  mm and bore hole depth  $h_0 \leq 10d_s$ ).
- 2.2. **Cracked or uncracked concrete:** Compressed air cleaning acc. to ETA-17/0128 ( $\geq 6$  bar) can be used for all sizes.
3. Prior to inserting the anchor rod into the filled bore hole, the position of the embedment depth shall be marked on the anchor.
4. Inject mixture into the hole only when an even color is flowing. Start filling from the bottom of the hole to avoid air pockets.
5. Push the threaded rod or reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached. Tightening with the torque wrench and predetermined value of  $T_{inst}$ .

### 3 INSTALLATION DATA IN CONCRETE


Installation parameters for Mungo Injection system MIT-Hybrid Plus in concrete based on ETA-17/0128 of 7 June 2019

#### 3.1 Installation parameters for threaded rod

| THREADED ROD SIZE                         |                          | M8                                 | M10 | M12              | M16 | M20                               | M24 | M27 | M30 |
|-------------------------------------------|--------------------------|------------------------------------|-----|------------------|-----|-----------------------------------|-----|-----|-----|
| Thread diameter                           | d [mm]                   | 8                                  | 10  | 12               | 16  | 20                                | 24  | 27  | 30  |
| MIT-Hybrid Plus INSTALLATION DATA         |                          |                                    |     |                  |     |                                   |     |     |     |
| Diameter of clearance hole in the fixture | d <sub>f</sub> [mm]      | 9                                  | 12  | 14               | 18  | 22                                | 26  | 30  | 33  |
| Drill hole diameter in substrate          | d <sub>0</sub> [mm]      | 10                                 | 12  | 14               | 18  | 22                                | 28  | 30  | 35  |
| Depth of drilled hole                     | h <sub>1</sub> [mm]      | h <sub>ef</sub> + 5 mm             |     |                  |     |                                   |     |     |     |
| Effective anchorage depth                 | h <sub>ef,min</sub> [mm] | 60                                 | 60  | 70               | 80  | 90                                | 96  | 108 | 120 |
|                                           | h <sub>ef,max</sub> [mm] | 160                                | 200 | 240              | 320 | 400                               | 480 | 540 | 600 |
| Installation torque                       | T <sub>inst</sub> ≤ [Nm] | 10                                 | 20  | 40 <sup>1)</sup> | 60  | 100                               | 170 | 250 | 300 |
| Minimum thickness of concrete member      | h <sub>min</sub> [mm]    | h <sub>ef</sub> + 30 mm (≥ 100 mm) |     |                  |     | h <sub>ef</sub> + 2d <sub>0</sub> |     |     |     |
| Minimum spacing                           | s <sub>min</sub> [mm]    | 40                                 | 50  | 60               | 75  | 95                                | 115 | 125 | 140 |
| Minimum edge distance                     | c <sub>min</sub> [mm]    | 35                                 | 40  | 45               | 50  | 60                                | 65  | 75  | 80  |

<sup>1)</sup>Maximum Torque moment for M12 with steel Grade 4.6 is 35 Nm


Threaded rods according to ETA-17/0128 of 7 June 2019

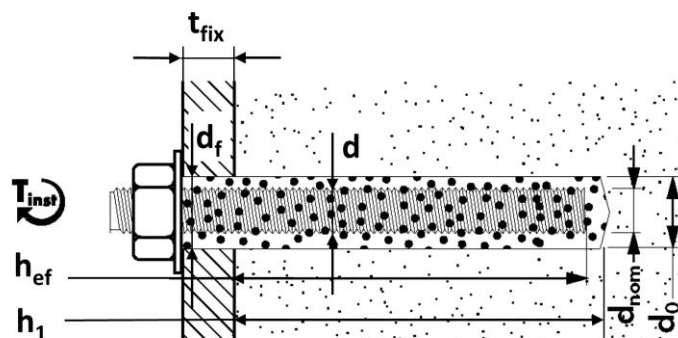

#### 3.2 Installation parameters for reinforcing bar (REBAR)


| REINFORCING BAR SIZE                 |                          | Ø8                                 | Ø10 | Ø12 | Ø14 | Ø16 | Ø20                               | Ø24 | Ø25 | Ø28 | Ø32 |
|--------------------------------------|--------------------------|------------------------------------|-----|-----|-----|-----|-----------------------------------|-----|-----|-----|-----|
| Rebar diameter                       | Ø [mm]                   | 8                                  | 10  | 12  | 14  | 16  | 20                                | 24  | 25  | 28  | 32  |
| MIT-Hybrid Plus INSTALLATION DATA    |                          |                                    |     |     |     |     |                                   |     |     |     |     |
| Drill hole diameter in substrate     | d <sub>0</sub> [mm]      | 12                                 | 14  | 16  | 18  | 20  | 25                                | 32  | 32  | 35  | 40  |
| Depth of drilled hole                | h <sub>1</sub> [mm]      | h <sub>ef</sub> + 5 mm             |     |     |     |     |                                   |     |     |     |     |
| Effective anchorage depth            | h <sub>ef,min</sub> [mm] | 60                                 | 60  | 70  | 75  | 80  | 90                                | 96  | 100 | 112 | 128 |
|                                      | h <sub>ef,max</sub> [mm] | 160                                | 200 | 240 | 280 | 320 | 400                               | 480 | 500 | 560 | 640 |
| Minimum thickness of concrete member | h <sub>min</sub> [mm]    | h <sub>ef</sub> + 30 mm (≥ 100 mm) |     |     |     |     | h <sub>ef</sub> + 2d <sub>0</sub> |     |     |     |     |
| Minimum spacing                      | s <sub>min</sub> [mm]    | 40                                 | 50  | 60  | 70  | 75  | 95                                | 120 | 120 | 130 | 150 |
| Minimum edge distance                | c <sub>min</sub> [mm]    | 35                                 | 40  | 45  | 50  | 50  | 60                                | 70  | 70  | 75  | 85  |

Reinforcing bars according to EN 1992-1-1:2004+AC:2010, Annex C

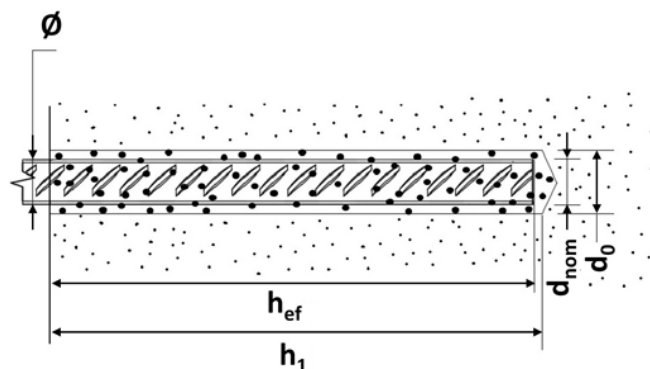

### 3.3 Installation parameters for internal threaded rod

| INTERNAL THREADED ROD SIZE                                  |                 |      | M6x80                                          | M6x90 | M8x80 | M8x100 | M10x80          | M10x100 |
|-------------------------------------------------------------|-----------------|------|------------------------------------------------|-------|-------|--------|-----------------|---------|
| Internal diameter of sleeve                                 | $d_1$           | [mm] | 6                                              | 6     | 8     | 8      | 10              | 10      |
| Outer diameter of sleeve                                    | $d_{nom}$       | [mm] | 10                                             | 10    | 12    | 12     | 16              | 16      |
| MIT-Hybrid Plus INSTALLATION DATA                           |                 |      |                                                |       |       |        |                 |         |
| Diameter of clearance hole in the fixture                   | $d_f$           | [mm] | 7                                              | 7     | 9     | 9      | 12              | 12      |
| Drill hole diameter in substrate                            | $d_0$           | [mm] | 12                                             | 12    | 14    | 14     | 18              | 18      |
| Depth of drilled hole                                       | $h_1$           | [mm] | $h_{ef} + 5 \text{ mm}$                        |       |       |        |                 |         |
| Internal threaded rod effective anchorage depth in concrete | $h_{ef}$        | [mm] | 80                                             | 90    | 80    | 100    | 80              | 100     |
| Installation torque                                         | $T_{inst} \leq$ | [Nm] | 10                                             | 10    | 10    | 10     | 20              | 20      |
| Screw or threaded rod effective anchorage depth             | $l_{IG,min}$    | [mm] | 8                                              | 8     | 8     | 8      | 10              | 10      |
|                                                             | $l_{IG,max}$    | [mm] | 20                                             | 20    | 20    | 20     | 25              | 25      |
| Minimum thickness of concrete member                        | $h_{min}$       | [mm] | $h_{ef} + 30 \text{ mm} (\geq 100 \text{ mm})$ |       |       |        | $h_{ef} + 2d_0$ |         |
| Minimum spacing                                             | $s_{min}$       | [mm] | 50                                             | 50    | 60    | 60     | 75              | 75      |
| Minimum edge distance                                       | $c_{min}$       | [mm] | 40                                             | 40    | 45    | 45     | 50              | 50      |

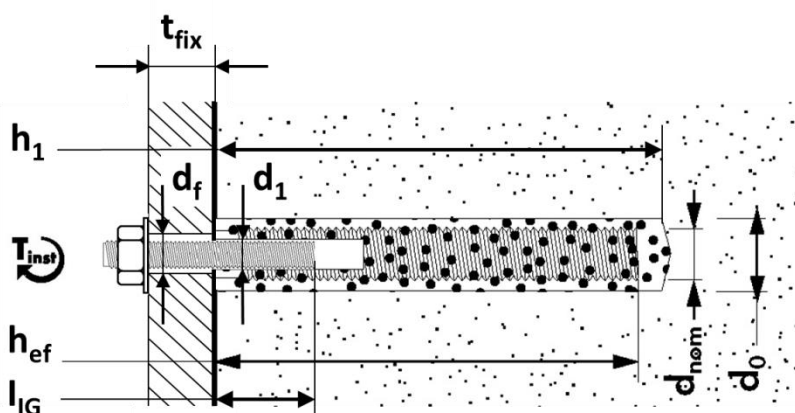

## 4 RECOMMENDED TENSION RESISTANCE

Basic performance data for MIT-Hybrid Plus system in cracked and non-cracked concrete C20/25 without influence of edge distance, spacing and splitting failure due to dimensions of concrete member

### REQUIRED PROOFS FOR RECOMMENDED TENSION RESISTANCE:

For design tension resistance with chemical system MIT-Hybrid Plus the minimum value for combined pull-out, concrete cone failure and steel failure needs to be considered:

For use in non-cracked concrete;  $N_{rec,ucr} = \min(N_{rec,c,ucr}; N_{rec,s})$

For use in cracked concrete;  $N_{rec,cr} = \min(N_{rec,c,cr}; N_{rec,s})$

### 4.1 Recommended tension resistance ( $N_{rec,c}$ ) for combined pull-out and concrete cone failure (cracked or non-cracked concrete C20/25 with threaded rod)

| Metrical Thread Size        |             |                 | [mm]            | M8   | M10    | M12    | M16    | M20    | M24     | M27     | M30     |         |
|-----------------------------|-------------|-----------------|-----------------|------|--------|--------|--------|--------|---------|---------|---------|---------|
| Setting Depth $h_{ef}$ [mm] | 60          | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] | 12.17* | 12.17* |        |        |         |         |         |         |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      | 5.03   | 6.73   |        |        |         |         |         |         |
|                             | 70          | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] | 14.25  | 15.34* | 15.34* |        |         |         |         |         |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      | 5.87   | 7.86   | 10.06  |        |         |         |         |         |
|                             | 80          | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] | 16.28  | 18.74* | 18.74* | 18.74* |         |         |         |         |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      | 6.70   | 8.98   | 11.49  | 13.12* |         |         |         |         |
|                             | 90          | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] | 18.32  | 22.36* | 22.36* | 22.36* | 22.36*  |         |         |         |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      | 7.54   | 10.10  | 12.93  | 15.65* | 15.65*  |         |         |         |
|                             | 100         | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] | 20.35  | 25.44  | 26.19* | 26.19* | 26.19*  | 26.19*  |         |         |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      | 8.38   | 11.22  | 14.37  | 18.33* | 18.33*  | 18.33*  |         |         |
|                             | 125         | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] | 25.44  | 31.80  | 35.92  | 36.60* | 36.60*  | 36.60*  | 36.60*  | 36.60*  |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      | 10.48  | 14.03  | 17.96  | 25.62* | 25.62*  | 25.62*  | 25.62*  | 25.62*  |
|                             | 150         | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] | 30.53  | 38.16  | 43.10  | 48.11* | 48.11*  | 48.11*  | 48.11*  | 48.11*  |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      | 12.57  | 16.84  | 21.55  | 32.33  | 33.68*  | 33.68*  | 33.68*  | 33.68*  |
|                             | 175         | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] |        | 44.52  | 50.29  | 60.63* | 60.63*  | 60.63*  | 60.63*  | 60.63*  |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      |        | 19.64  | 25.14  | 37.71  | 42.44*  | 42.44*  | 42.44*  | 42.44*  |
|                             | 200         | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] |        | 50.88  | 57.47  | 71.84  | 74.08*  | 74.08*  | 74.08*  | 74.08*  |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      |        | 22.45  | 28.73  | 43.10  | 50.88   | 50.29   | 51.85*  | 51.85*  |
|                             | 250         | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] |        |        |        | 89.80  | 103.53* | 103.53* | 103.53* | 103.53* |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      |        |        |        | 53.88  | 63.61   | 62.86   | 70.71   | 72.47*  |
|                             | 300         | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] |        |        |        | 107.76 | 125.71  | 136.09* | 136.09* | 136.09* |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      |        |        |        | 64.65  | 76.33   | 75.43   | 84.86   | 94.29   |
|                             | 350         | Non-Cracked     | $N_{rec,c,ucr}$ | [kN] |        |        |        |        | 146.67  | 163.43  | 171.49* | 171.49* |
|                             |             | Cracked         | $N_{rec,c,cr}$  |      |        |        |        |        | 89.05   | 88.00   | 99.00   | 110.00  |
| 400                         | Non-Cracked | $N_{rec,c,ucr}$ | [kN]            |      |        |        |        | 167.62 | 186.78  | 209.52* | 209.52* |         |
|                             | Cracked     | $N_{rec,c,cr}$  |                 |      |        |        |        | 101.77 | 100.57  | 113.14  | 125.71  |         |
| 450                         | Non-Cracked | $N_{rec,c,ucr}$ | [kN]            |      |        |        |        |        | 210.12  | 236.39  | 250.01* |         |
|                             | Cracked     | $N_{rec,c,cr}$  |                 |      |        |        |        |        | 113.14  | 127.29  | 141.43  |         |
| 500                         | Non-Cracked | $N_{rec,c,ucr}$ | [kN]            |      |        |        |        |        |         | 262.65  | 291.84  |         |
|                             | Cracked     | $N_{rec,c,cr}$  |                 |      |        |        |        |        |         | 141.43  | 157.14  |         |
| 550                         | Non-Cracked | $N_{rec,c,ucr}$ | [kN]            |      |        |        |        |        |         |         | 321.02  |         |
|                             | Cracked     | $N_{rec,c,cr}$  |                 |      |        |        |        |        |         |         | 172.86  |         |
| 600                         | Non-Cracked | $N_{rec,c,ucr}$ | [kN]            |      |        |        |        |        |         |         | 350.20  |         |
|                             | Cracked     | $N_{rec,c,cr}$  |                 |      |        |        |        |        |         |         | 188.57  |         |

\*Concrete cone failure

### Recommended tension resistance for steel failure ( $N_{rec,s}$ ):

| Metrical Thread Size |                               |             | [mm] | M8    | M10   | M12   | M16   | M20   | M24    | M27    | M30    |
|----------------------|-------------------------------|-------------|------|-------|-------|-------|-------|-------|--------|--------|--------|
| Steel property class | Zinc Plated 4.6               | $N_{rec,s}$ | [kN] | 5.23  | 8.27  | 12.04 | 22.42 | 34.97 | 50.40  | 65.51  | 80.13  |
|                      | Zinc Plated 5.8               | $N_{rec,s}$ | [kN] | 8.72  | 13.79 | 20.06 | 37.37 | 58.29 | 84.00  | 109.19 | 133.54 |
|                      | Zinc Plated 8.8               | $N_{rec,s}$ | [kN] | 13.95 | 22.07 | 32.10 | 59.79 | 93.27 | 134.40 | 174.70 | 213.67 |
|                      | Stainless steel A4-70         | $N_{rec,s}$ | [kN] | 9.79  | 15.49 | 22.53 | 41.97 | 65.46 | 94.33  | —      | —      |
|                      | Stainless steel HCR, class 70 | $N_{rec,s}$ | [kN] | 9.79  | 15.49 | 22.53 | 41.97 | 65.46 | 94.33  | —      | —      |

Recommended tension resistance for steel failure ( $N_{rec,s}$ ) can be applied for cracked or non-cracked concrete.

#### 4.2 Recommended tension resistance ( $N_{rec,c}$ ) for combined pull-out and concrete cone failure (cracked and non-cracked concrete C20/25 with reinforcing bar (REBAR))

| Rebar Size                  |     |             |                 | [mm] | Ø8    | Ø10    | Ø12    | Ø14    | Ø16    | Ø20    | Ø24     | Ø25     | Ø28     | Ø32     |
|-----------------------------|-----|-------------|-----------------|------|-------|--------|--------|--------|--------|--------|---------|---------|---------|---------|
| Setting Depth $h_{ef}$ [mm] | 60  | Non-Cracked | $N_{rec,c,ucr}$ | [kN] | 10.06 | 12.17* |        |        |        |        |         |         |         |         |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      | 3.95  | 4.94   |        |        |        |        |         |         |         |         |
|                             | 70  | Non-Cracked | $N_{rec,c,ucr}$ | [kN] | 11.73 | 14.67  | 15.34* |        |        |        |         |         |         |         |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      | 4.61  | 5.76   | 7.54   |        |        |        |         |         |         |         |
|                             | 80  | Non-Cracked | $N_{rec,c,ucr}$ | [kN] | 13.41 | 16.76  | 18.74* | 18.74* | 18.74* |        |         |         |         |         |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      | 5.27  | 6.59   | 8.62   | 10.90  | 12.45  |        |         |         |         |         |
|                             | 90  | Non-Cracked | $N_{rec,c,ucr}$ | [kN] | 15.09 | 18.86  | 22.36* | 22.36* | 22.36* | 22.36* | 22.36*  |         |         |         |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      | 5.93  | 7.41   | 9.70   | 12.26  | 14.01  | 15.65* | 15.65*  |         |         |         |
|                             | 100 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] | 16.76 | 20.95  | 25.14  | 26.19* | 26.19* | 26.19* | 26.19*  | 26.19*  |         |         |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      | 6.59  | 8.23   | 10.78  | 13.62  | 15.56  | 18.33* | 18.33*  | 18.33*  |         |         |
|                             | 125 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] | 20.95 | 26.19  | 31.43  | 36.60* | 36.60* | 36.60* | 36.60*  | 36.60*  | 36.60*  | 36.60*  |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      | 8.23  | 10.29  | 13.47  | 17.02  | 19.46  | 24.32  | 25.62*  | 25.62*  | 25.62*  | 25.62*  |
|                             | 150 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] | 25.14 | 31.43  | 37.71  | 44.00  | 46.69  | 48.11* | 48.11*  | 48.11*  | 48.11*  | 48.11*  |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      | 9.88  | 12.35  | 16.16  | 20.43  | 23.35  | 29.18  | 33.68*  | 33.68*  | 33.68*  | 33.68*  |
|                             | 175 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       | 36.67  | 44.00  | 51.33  | 54.48  | 60.63* | 60.63*  | 60.63*  | 60.63*  | 60.63*  |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       | 14.40  | 18.86  | 23.83  | 27.24  | 34.05  | 40.86   | 42.44*  | 42.44*  | 42.44*  |
|                             | 200 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       | 41.90  | 50.29  | 58.67  | 62.26  | 74.08* | 74.08*  | 74.08*  | 74.08*  | 74.08*  |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       | 16.46  | 21.55  | 27.24  | 31.13  | 38.91  | 46.69   | 51.85*  | 51.85*  | 51.85*  |
|                             | 250 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       |        |        | 73.33  | 77.82  | 97.28  | 103.53* | 103.53* | 103.53* | 103.53* |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       |        |        | 34.05  | 38.91  | 48.64  | 58.37   | 65.48   | 72.47*  | 72.47*  |
|                             | 300 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       |        |        |        | 93.39  | 116.73 | 136.09* | 136.09* | 136.09* | 136.09* |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       |        |        |        | 46.69  | 58.37  | 70.04   | 78.57   | 88.00   | 95.26*  |
|                             | 350 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       |        |        |        |        | 136.19 | 163.43  | 170.24  | 171.49* | 171.49* |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       |        |        |        |        | 68.10  | 81.71   | 91.67   | 102.67  | 117.33  |
|                             | 400 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       |        |        |        |        | 155.65 | 186.78  | 194.56  | 209.52* | 209.52* |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       |        |        |        |        | 77.82  | 93.39   | 104.76  | 117.33  | 134.10  |
|                             | 450 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       |        |        |        |        | 210.12 | 218.88  | 218.88  | 245.14  | 250.01* |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       |        |        |        |        | 105.06 | 117.86  | 117.86  | 132.00  | 150.86  |
|                             | 500 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       |        |        |        |        |        |         | 243.20  | 272.38  | 292.82* |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       |        |        |        |        |        |         | 130.95  | 146.67  | 167.62  |
|                             | 550 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       |        |        |        |        |        |         |         | 299.62  | 337.82* |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       |        |        |        |        |        |         |         | 161.33  | 184.38  |
|                             | 600 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |       |        |        |        |        |        |         |         |         | 373.55  |
|                             |     | Cracked     | $N_{rec,c,cr}$  |      |       |        |        |        |        |        |         |         |         | 201.14  |

\*Concrete cone failure

#### Recommended tension resistance for steel failure ( $N_{rec,s}$ ):

| Rebar Size               |  |             |      | [mm] | Ø8    | Ø10   | Ø12   | Ø14   | Ø16   | Ø20   | Ø24    | Ø25    | Ø28    | Ø32    |
|--------------------------|--|-------------|------|------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
| Steel property BSt 500 S |  | $N_{rec,s}$ | [kN] |      | 14.10 | 22.03 | 31.72 | 43.18 | 56.39 | 88.11 | 126.88 | 137.68 | 172.70 | 225.57 |

Recommended tension resistance for steel failure ( $N_{rec,s}$ ) can be applied for cracked or non-cracked concrete.

#### 4.3 Recommended tension resistance ( $N_{rec,c}$ ) for combined pull-out and concrete cone failure (cracked and non-cracked concrete C20/25 with internal threaded anchor rod)

| Internal threaded anchor rod |     |             |                 | [mm] | MIG-M6 | MIG-M8 | MIG-M10 |
|------------------------------|-----|-------------|-----------------|------|--------|--------|---------|
| Setting Depth hef [mm]       | 80  | Non-Cracked | $N_{rec,c,ucr}$ | [kN] | 18.74* |        |         |
|                              |     | Cracked     | $N_{rec,c,cr}$  |      | 8.98   |        |         |
|                              | 90  | Non-Cracked | $N_{rec,c,ucr}$ | [kN] | 22.36* |        |         |
|                              |     | Cracked     | $N_{rec,c,cr}$  |      | 10.10  |        |         |
|                              | 80  | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |        | 18.74* |         |
|                              |     | Cracked     | $N_{rec,c,cr}$  |      |        | 11.49  |         |
|                              | 100 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |        | 26.19* |         |
|                              |     | Cracked     | $N_{rec,c,cr}$  |      |        | 14.37  |         |
|                              | 80  | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |        |        | 18.74*  |
|                              |     | Cracked     | $N_{rec,c,cr}$  |      |        |        | 13.12*  |
|                              | 100 | Non-Cracked | $N_{rec,c,ucr}$ | [kN] |        |        | 26.19*  |
|                              |     | Cracked     | $N_{rec,c,cr}$  |      |        |        | 18.33*  |

\*Concrete cone failure

#### Recommended tension resistance for steel failure ( $N_{rec,s}$ ):

| Internal threaded anchor rod |                       |  |             | [mm] | MIG-M6 | MIG-M8 | MIG-M10 |
|------------------------------|-----------------------|--|-------------|------|--------|--------|---------|
| Steel class                  | Zinc Plated 5.8       |  | $N_{rec,s}$ | [kN] | 4.76   | 8.10   | 13.81   |
|                              | Stainless steel A4-70 |  | $N_{rec,s}$ | [kN] | 5.35   | 9.93   | 15.66   |

Recommended tension resistance for steel failure ( $N_{rec,s}$ ) can be applied for cracked or non-cracked concrete.

## 5 RECOMMENDED SHEAR RESISTANCE

Basic performance data for MIT-Hybrid Plus system in cracked and non-cracked concrete C20/25 without influence of edge distance, spacing and splitting failure due to dimensions of concrete member

### REQUIRED PROOFS FOR RECOMMENDED SHEAR RESISTANCE:

For design shear resistance with chemical system MIT Hybrid Plus the minimum value for concrete pry-out failure and steel failure needs to be considered:

For use in non-cracked concrete;  $V_{rec,ucr} = \min(V_{rec,cp,ucr}; V_{rec,s})$

For use in cracked concrete;  $V_{rec,cr} = \min(V_{rec,cp,cr}; V_{rec,s})$

### 5.1 Recommended shear resistance for concrete pry-out failure ( $V_{rec,cp}$ ) (cracked or non-cracked concrete C20/25 with threaded rod)

| Metrical Thread Size        |     |             |                  | [mm] | M8    | M10    | M12    | M16    | M20    | M24    | M27    | M30    |
|-----------------------------|-----|-------------|------------------|------|-------|--------|--------|--------|--------|--------|--------|--------|
| Setting Depth $h_{ef}$ [mm] | 60  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 24.34 | 24.34  |        |        |        |        |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 10.06 | 13.47  |        |        |        |        |        |        |
|                             | 70  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 28.50 | 30.68  | 30.68  |        |        |        |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 11.73 | 15.71  | 20.11  |        |        |        |        |        |
|                             | 80  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 32.57 | 37.48  | 37.48  | 37.48  |        |        |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 13.41 | 17.96  | 22.99  | 26.24  |        |        |        |        |
|                             | 90  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 36.64 | 44.72  | 44.72  | 44.72  | 44.72  |        |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 15.09 | 20.20  | 25.86  | 31.31  | 31.31  |        |        |        |
|                             | 100 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 40.71 | 50.88  | 52.38  | 52.38  | 52.38  | 52.38  |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 16.76 | 22.45  | 28.73  | 36.67  | 36.67  | 36.67  |        |        |
|                             | 125 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 50.88 | 63.61  | 71.84  | 73.20  | 73.20  | 73.20  | 73.20  | 73.20  |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 20.95 | 28.06  | 35.92  | 51.24  | 51.24  | 51.24  | 51.24  | 51.24  |
|                             | 150 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 61.06 | 76.33  | 86.20  | 96.23  | 96.23  | 96.23  | 96.23  | 96.23  |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 25.14 | 33.67  | 43.10  | 64.65  | 67.36  | 67.36  | 67.36  | 67.36  |
|                             | 175 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       | 89.05  | 100.57 | 121.26 | 121.26 | 121.26 | 121.26 | 121.26 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       | 39.29  | 50.29  | 75.43  | 84.88  | 84.88  | 84.88  | 84.88  |
|                             | 200 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       | 101.77 | 114.94 | 143.67 | 148.16 | 148.16 | 148.16 | 148.16 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       | 44.90  | 57.47  | 86.20  | 101.77 | 100.57 | 103.71 | 103.71 |
|                             | 250 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |        |        | 179.59 | 207.05 | 207.05 | 207.05 | 207.05 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |        |        | 107.76 | 127.21 | 125.71 | 141.43 | 144.94 |
|                             | 300 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |        |        | 215.51 | 251.43 | 272.18 | 272.18 | 272.18 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |        |        | 129.31 | 152.65 | 150.86 | 169.71 | 188.57 |
|                             | 350 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |        |        |        | 293.33 | 326.86 | 342.99 | 342.99 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |        |        |        | 178.10 | 176.00 | 198.00 | 220.00 |
|                             | 400 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |        |        |        | 335.24 | 373.55 | 419.05 | 419.05 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |        |        |        | 203.54 | 201.14 | 226.29 | 251.43 |
|                             | 450 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |        |        |        |        | 420.24 | 472.78 | 500.03 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |        |        |        |        | 226.29 | 254.57 | 282.86 |
|                             | 500 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |        |        |        |        |        | 525.31 | 583.67 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |        |        |        |        |        | 282.86 | 314.29 |
|                             | 550 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |        |        |        |        |        |        | 642.04 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |        |        |        |        |        |        | 345.71 |
|                             | 600 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |        |        |        |        |        |        | 700.41 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |        |        |        |        |        |        | 377.14 |

### Recommended shear resistance for steel failure ( $V_{rec,s}$ ):

| Metrical Thread Size |                               |             |      | [mm] | M8   | M10   | M12   | M16   | M20   | M24   | M27    | M30    |
|----------------------|-------------------------------|-------------|------|------|------|-------|-------|-------|-------|-------|--------|--------|
| Steel property class | Zinc Plated 4.6               | $V_{rec,s}$ | [kN] |      | 3.76 | 5.95  | 8.65  | 16.11 | 25.13 | 36.22 | 47.07  | 57.58  |
|                      | Zinc Plated 5.8               | $V_{rec,s}$ | [kN] |      | 5.23 | 8.27  | 12.04 | 22.42 | 34.97 | 50.40 | 65.51  | 80.13  |
|                      | Zinc Plated 8.8               | $V_{rec,s}$ | [kN] |      | 8.37 | 13.24 | 19.26 | 35.87 | 55.96 | 80.64 | 104.82 | 128.20 |
|                      | Stainless steel A4-70         | $V_{rec,s}$ | [kN] |      | 5.87 | 9.28  | 13.50 | 25.15 | 39.23 | 56.54 | —      | —      |
|                      | Stainless steel HCR, class 70 | $V_{rec,s}$ | [kN] |      | 5.87 | 9.28  | 13.50 | 25.15 | 39.23 | 56.54 | —      | —      |

Recommended tension resistance for steel failure ( $V_{rec,s}$ ) can be applied for cracked or non-cracked concrete.



## 5.2 Recommended shear resistance for concrete pry-out failure ( $V_{rec,cp}$ ) (cracked or non-cracked concrete C20/25 with reinforcing bar (REBAR))

| Rebar Size                  |     |             | [mm]             | Ø8   | Ø10   | Ø12   | Ø14   | Ø16    | Ø20    | Ø24    | Ø25    | Ø28    | Ø32    |
|-----------------------------|-----|-------------|------------------|------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
| Setting Depth $h_{ef}$ [mm] | 60  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 20.11 | 24.34 |       |        |        |        |        |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 7.90  | 9.88  |       |        |        |        |        |        |        |
|                             | 70  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 23.47 | 29.33 | 15.34 |        |        |        |        |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 9.22  | 11.52 | 15.09 |        |        |        |        |        |        |
|                             | 80  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 26.82 | 33.52 | 18.74 | 37.48  | 37.48  |        |        |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 10.54 | 13.17 | 17.24 | 21.79  | 24.90  |        |        |        |        |
|                             | 90  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 30.17 | 37.71 | 22.36 | 44.72  | 44.72  | 44.72  | 44.72  |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 11.85 | 14.82 | 19.40 | 24.51  | 28.02  | 31.31  | 31.31  |        |        |
|                             | 100 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 33.52 | 41.90 | 26.19 | 52.38  | 52.38  | 52.38  | 52.38  |        |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 13.17 | 16.46 | 21.55 | 27.24  | 31.13  | 36.67  | 36.67  |        |        |
|                             | 125 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 41.90 | 52.38 | 36.60 | 73.20  | 73.20  | 73.20  | 73.20  | 73.20  | 73.20  |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 16.46 | 20.58 | 26.94 | 34.05  | 38.91  | 48.64  | 51.24  | 51.24  | 51.24  |
|                             | 150 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 50.29 | 62.86 | 48.11 | 88.00  | 93.39  | 96.23  | 96.23  | 96.23  | 96.23  |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] | 19.76 | 24.69 | 32.33 | 40.86  | 46.69  | 58.37  | 67.36  | 67.36  | 67.36  |
|                             | 175 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       | 73.33 | 60.63 | 102.67 | 108.95 | 121.26 | 121.26 | 121.26 | 121.26 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       | 28.81 | 37.71 | 47.67  | 54.48  | 68.10  | 81.71  | 84.88  | 84.88  |
|                             | 200 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       | 83.81 | 74.08 | 117.33 | 124.52 | 148.16 | 148.16 | 148.16 | 148.16 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       | 32.93 | 43.10 | 54.48  | 62.26  | 77.82  | 93.39  | 103.71 | 103.71 |
|                             | 250 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |       |       | 146.67 | 155.65 | 194.56 | 207.05 | 207.05 | 207.05 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |       |       | 68.10  | 77.82  | 97.28  | 116.73 | 130.95 | 144.94 |
|                             | 300 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |       |       | 186.78 | 233.47 | 272.18 | 272.18 | 272.18 | 272.18 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |       |       | 93.39  | 116.73 | 140.08 | 157.14 | 176.00 | 190.53 |
|                             | 350 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |       |       |        | 272.38 | 326.86 | 340.48 | 342.99 | 342.99 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |       |       |        | 136.19 | 163.43 | 183.33 | 205.33 | 234.67 |
|                             | 400 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |       |       |        | 311.29 | 373.55 | 389.12 | 419.05 | 419.05 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |       |       |        | 155.65 | 186.78 | 209.52 | 234.67 | 268.19 |
|                             | 450 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |       |       |        | 420.24 | 437.76 | 437.76 | 490.29 | 500.03 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |       |       |        | 210.12 | 235.71 | 235.71 | 264.00 | 301.71 |
|                             | 500 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |       |       |        |        | 486.39 | 544.76 | 585.64 |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |       |       |        |        | 261.90 | 293.33 | 335.24 |        |
|                             | 550 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |       |       |        |        |        | 599.24 | 675.64 |        |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |       |       |        |        |        | 322.67 | 368.76 |        |
|                             | 600 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |       |       |       |        |        |        |        |        | 747.10 |
|                             |     | Cracked     | $V_{rec,cp,cr}$  | [kN] |       |       |       |        |        |        |        |        | 402.29 |

## Recommended shear resistance for steel failure ( $V_{rec,s}$ ):

| Rebar Size               |  |  | [mm]        | Ø8   | Ø10  | Ø12   | Ø14   | Ø16   | Ø20   | Ø24   | Ø25   | Ø28   | Ø32   |
|--------------------------|--|--|-------------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Steel property BST 500 S |  |  | $V_{rec,s}$ | [kN] | 6.58 | 10.28 | 14.80 | 20.15 | 26.32 | 41.12 | 59.21 | 64.25 | 80.59 |

Recommended tension resistance for steel failure ( $V_{rec,s}$ ) can be applied for cracked or non-cracked concrete.



### 5.3 Recommended shear resistance for concrete pry-out failure ( $V_{rec,cp}$ ) (cracked or non-cracked concrete C20/25 with internal threaded anchor rod)

| Internal threaded anchor rod |     |             |                  | [mm] | MIG-M6 | MIG-M8 | MIG-M10 |
|------------------------------|-----|-------------|------------------|------|--------|--------|---------|
| Setting Depth hef [mm]       | 80  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 37.48  |        |         |
|                              |     | Cracked     | $V_{rec,cp,cr}$  |      | 17.96  |        |         |
|                              | 90  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] | 44.72  |        |         |
|                              |     | Cracked     | $V_{rec,cp,cr}$  |      | 20.20  |        |         |
|                              | 80  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |        | 37.48  |         |
|                              |     | Cracked     | $V_{rec,cp,cr}$  |      |        | 22.99  |         |
|                              | 100 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |        | 52.38  |         |
|                              |     | Cracked     | $V_{rec,cp,cr}$  |      |        | 28.73  |         |
|                              | 80  | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |        |        | 28.73   |
|                              |     | Cracked     | $V_{rec,cp,cr}$  |      |        |        | 26.24   |
|                              | 100 | Non-Cracked | $V_{rec,cp,ucr}$ | [kN] |        |        | 35.92   |
|                              |     | Cracked     | $V_{rec,cp,cr}$  |      |        |        | 36.67   |

### Recommended shear resistance for steel failure ( $V_{rec,s}$ ):

| Internal threaded anchor rod |                       |             |      | [mm] | MIG-M6 | MIG-M8 | MIG-M10 |
|------------------------------|-----------------------|-------------|------|------|--------|--------|---------|
| Steel class                  | Zinc Plated 5.8       | $V_{rec,s}$ | [kN] |      | 2.86   | 5.14   | 8.57    |
|                              | Stainless steel A4-70 | $V_{rec,s}$ | [kN] |      | 3.21   | 5.95   | 9.16    |

Recommended tension resistance for steel failure ( $V_{rec,s}$ ) can be applied for cracked or non-cracked concrete.

## 6 MORTAR PROPERTIES

### 6.1 Mortar properties data for MIT Hybrid Plus system:

| Properties            | Test Method      | Result                                |
|-----------------------|------------------|---------------------------------------|
| UV resistance         |                  | Pass                                  |
| Watertightness        | DIN EN 12390-8   | 0 mm                                  |
| Temperature stability |                  | $\leq 160^{\circ}\text{C}$            |
| Density               |                  | 1.78 kg / dm <sup>3</sup>             |
| Compressiv strenght   | DIN EN 196-1     | 122 N / mm <sup>2</sup>               |
| Tensile strenght      | DIN EN ISO 527-2 | 14.9 N / mm <sup>2</sup>              |
| Flxural strenght      | DIN EN 196-1     | 22.2 N / mm <sup>2</sup>              |
| E modulus             | DIN EN 527-2 ISO | 8300 N / mm <sup>2</sup>              |
| Shrinkage             | DIN 52450        | < 0.2 %                               |
| Hardness Shore A      | DIN EN ISO 868   | 97.6                                  |
| Electrical resistance | DIN IEC 93       | $7.2 \times 10^{13} \Omega \text{ m}$ |
| Thermal conductivity  | DIN EN 993-15    | 1.06 W/m·K                            |
| Thermal heat capacity | DIN EN 993-15    | 1.090 J/kg·K                          |

## 6.2 Chemical resistance data for MIT Hybrid Plus system:

| Chemical Agent                | Concentration | Resistant | Not Resistant |
|-------------------------------|---------------|-----------|---------------|
| Acetic acid                   | 10            | *         |               |
| Acetone                       | 100           |           | *             |
| Ammonia, aqueous solution     | 5             | *         |               |
| Benzyl Alcohol                | 100           |           | *             |
| Chlorinated lime              | 10            | *         |               |
| Citric acid                   | 10            | *         |               |
| Chlorine water, swimming pool | All           | *         |               |
| Demineralized Water           | 100           | *         |               |
| Diesel oil                    | 100           | *         |               |
| Ethanol                       | 100           |           | *             |
| Ethyl Acetate                 | 100           |           | *             |
| Formic acid                   | 100           |           | *             |
| Fuel Oil                      | 100           | *         |               |
| Gasoline (premium grade)      | 100           | *         |               |
| Glycol (Ethylene glycol)      | 100           |           | *             |
| Hydraulic fluid               | 100           | *         |               |
| Hydrogen peroxide             | 10            |           | *             |
| Isopropyl alcohol             | 100           |           | *             |
| Lactic acid                   | 10            | *         |               |
| Linseed oil                   | 100           | *         |               |
| Lubricating oil               | 100           | *         |               |
| Nitric acid                   | 10            |           | *             |
| Methanol                      | 100           |           | *             |
| Phosphoric acid               | 10            | *         |               |
| Potassium Hydroxide ph 13.2   | 100           | *         |               |
| Salt (Calcium Chloride)       | 100           | *         |               |
| Sea water, salty              | 100           | *         |               |
| Sodium carbonate              | 10            | *         |               |
| Sulfuric acid                 | 10            | *         |               |

Results shown in the table are applicable to brief periods of chemical contact with full cured adhesive (e.g. temporary contact with adhesive during a spill).

## 7 IMPORTANT NOTICE

For the design the complete technical assessment ETA-17/0128 of 7 June 2019 has to be considered. Values given above are only valid under the assumptions of sufficient cleaning the drill hole with compressed air ( $\geq 6$  bar, ETA-17/0128, Annex B3 and B4) and anchoring in concrete (strength classes C20/25 to C50/60 according to EN 206:2013). Recommended resistance data in this document, do not consider the influence of edge distance, spacing and splitting failure due to limited dimensions of concrete member and in case of such influence, the above values should be reduced. In recommended resistance the partial safety factor as regulated in the ETA and partial safety factor of the load  $\gamma_F = 1.4$  are considered. For combination of tensile loads, shear loads, bending moments as well as reduced edge distances or spacing's (anchor groups) see ETA or Mungo design software. The data above must be checked by the user under the responsibility of an engineer experienced in anchorage and concrete work. This is to ensure there are no errors and all data is complete and accurate and complies with all rules and regulations for the actual conditions and application.